



Knowledge Based Expert Advisory System for Transport Demand Management

Resdiansyah Mansyur¹, Riza Atiq O.K.Rahmat², Amiruddin Ismail³, Mohamad Raduan Kabit⁴,

¹ School of Civil Engineering, Linton University College
BUTL, batu 12, Mantin, Negeri Sembilan, 71700, Malaysia
Tel.: + 606-7587888, E-mail: dianlya@legendagroup.edu.my

^{1,2,3} Sustainable Urban Transport Research Center (SUTRA), Universiti Kebangsaan Malaysia
Bangi, Selangor, 43600, Malaysia
Tel.: + 603-8921 5039, E-mail: riza@vlsi.eng.ukm.my, abim@vlsi.eng.ukm.my

⁴ Department of Civil Engineering, Universiti Malaysia Sarawak
Kota Samarahan, 93400 Kuching, Sarawak.
Tel.: +6082-581 000. E-mail: kraduan@feng.unimas.my

Abstract—In view of the fact that supply strategies alone could not solve urban congestion, many cities around the globe have adopted Transport Demand Management (TDM) strategies as part and partial of their congestion mitigation plan. TDM comprises several strategies and policies that aim to modifying travelers behaviour. TDM comprises strategies and policies that are different in nature which can be divided into several categories according to how they affect travelers' behavior. Selecting and determining suitable TDM strategies for a particular congestion mitigation goal can be a complex task; thus requires expertise. In this regards, the effectiveness of a TDM strategy is primarily depending on whether its selection was appropriately examined prior to its field implementation. This paper presents the development of a Knowledge based expert advisory system for TDM. The process of organizing the available knowledge of TDM strategies, as well as the process leading to the selection of one or more strategy advice, is encoded in the knowledge based expert system shell developed for the purpose by using shell expert system Kappa-PC version 2.4 which was adopted object oriented and high resolution graphical user interface. The advice given from the working system was evaluated and validated by comparing the output of the system against the recommendations made by transportation professionals. The evaluations indicate favourable results for the system. The expert advisory system can be used as a decision support system as well as a teaching tool for junior transportation engineers, planners, private developers, and government officials.

Keywords— Transport Demand Management, Knowledge-Base, Expert System.

I. INTRODUCTION

As traffic grows around the world, congestion becomes more widespread and occurs significantly longer during weekdays. As such congestion and traffic-related pollution are increasingly becoming major issues in towns and cities world-wide. According to Kuala Lumpur Structure Plan 2020 released by Kuala Lumpur City Council, private cars are rising dramatically. The increasing reliance on private transportation, in particular private cars, has created considerable pressure on the road network which consequently has contributed to the problems of traffic

congestion. Providing more road spaces to keep pace with traffic demand is not the answer. It would be far too expensive and socially disruptive, and would exacerbate the long term problem which was initially trying to be tackled. Some people argued that we should let traffic find its own level, thus forcing drivers to find alternative ways of travel, or not to travel at all. However, we believe this would mean abdicating our economic, social and environmental responsibilities. In the meantime, the countryside and urban areas would both suffer significant deterioration. The only realistic option is to seek ways of first controlling, then reversing, the growth in traffic. This needs to be done in the

most equitable way, acknowledging that there are sections of society for who travel choices are more limited.

II. LITERATURE REVIEW

A. TDM as Solution

In the last decades, traffic and transport engineers and practitioners had come to the conclusion that traffic problems can be mastered only through the introduction of appropriate Transport Demand Management (TDM) measures rather than through the provision of new highway infrastructure [8]. Demands on travelling increasing with the assumptions that private car is the best or the only solution for mobility. The supply for the infrastructure increases proportional to traffic volume. At one point, supply cannot meet demands due to certain factors such as budget, land or space issue [9]. Allowing traffic to grow to levels at which there is extensive and regular congestion is economically inefficient [3]. Although the construction of additional road capacity can alleviate some of the effects of congestion, the benefits may be counterbalanced unless growth in traffic volumes can be restrained. Therefore, another alternative is by implementing TDM, which is to make sure that people still travel but at the same time reducing the private car usage [9].

B. How Expert Advisory System Can Help Us

The implementation of TDM requires experts' knowledge, skills and experiences; as they are able to undertake a complex scenario analysis and subsequently can provide reliable TDM solutions based on the specific context of the problem (e.g. purpose and location details). As argued, expert are not always available, nor do they always have the time to consult all possible references, review available data, etc [7]. This will lead towards time consuming on scheduling appointments and interviews, thus delaying one project. There is also a possibility that there might be no more adviser persons left upon death since most of them are at elderly age.

III. METHODOLOGY

A. Development of Expert Advisory System

Advisory system is an expert system that provides advice to a user [1]. Advisory systems provide the advices and assist for solving problems that are normally solved by human experts. They can be classified as a type of expert systems [4]. According to Aronson & Turban [2], both advisory systems and expert systems are problem-solving packages that mimic a human expert in a special area. These systems are constructed by eliciting knowledge from human experts and coding it into a form that can be used by a computer in the evaluation of alternative solutions to problems within that domain of expertise. On the other hand, Gregg and Walczak [5] were stated that advisory systems are designed to support decision making in more unstructured situations which have no single correct answer.

Various methods have been applied in knowledge acquisition process in order to collect data from books, encyclopedia, and expert people in transportation, also

known as expert domain. There are lots of TDM strategies listed and understanding each of it is very important. Based on the summary provided, the most suitable and appropriate TDM strategies are then identified based on specific objectives and geographical area. The final advices are chosen according to the most appropriate three strategies among very appropriate list determined by expert domain. Suppose there are less than three very appropriate strategies, and then the less appropriate TDM strategies are chosen in order to fill in the advising spaces. A computer tool used to develop the adviser system is by using open source software called Kappa-PC version 2.4. The first step is to create hierarchy from TDM strategies towards specific objectives, main purpose, choice of area and the final three advices respectively. Kappa-PC provides the developer with the flexibility and power required in supporting complex applications [6]. It allows the knowledge engineer to develop prototype using hybrid knowledge representation technique.

IV. RESULT & ANALYSIS

A. System Architecture & Application of E-ASSIST

The expert advisory system "E-ASSIST" is developed for young and inexperienced transport engineers and planners, who are involved in transportation demand management (TDM) strategy planning and implementation. Such system is able to provide them with reliable advices in order to effectively decide TDM strategies during the planning and implementation phases. Fig.1 represents the top-level hierarchical in the object model developed for the E-ASSISTS domain. The class E-ASSIST represents the overall prototype that is comprised of nine major subclasses. The module names in Fig.1 are boxed to indicate that their subclasses are not shown. Total are 27 hierarchies in subclasses according the main objective of TDM Strategies.

B. Illustration Example of E-ASSIST Domain

As an illustration of typical object representation in the E-ASSIST domain, the hierarchy of *CRImprovedtransportoption* class which is a descendant of the *CongestionReduction* class is shown in Fig.1 above. *CRITOLargeUrban* class is geographical area entity that represents appropriate condition of area need to be implementing TDM strategies. It contains the slots:(i) *PublicTransportImprovement1*, which indicates the strategy on Public Transit (also called Mass-Transit) includes various services using shared vehicles to provide mobility to the public; (ii) *NonMotorTransportPlan1*, which indicates Non-motorized Transportation (also known as Active Transportation and Human Powered Transportation) includes walking and bicycling, and variants such as Small-Wheeled Transport (skates, skateboards, push scooters and hand carts) and Wheelchair travel; (iii) *Ridesharing1*, which refers to carpooling and vanpooling (the term is sometimes also applied to public transit, particularly commuter express bus), in which vehicles carry additional passengers. Carpooling uses participants' own automobiles.

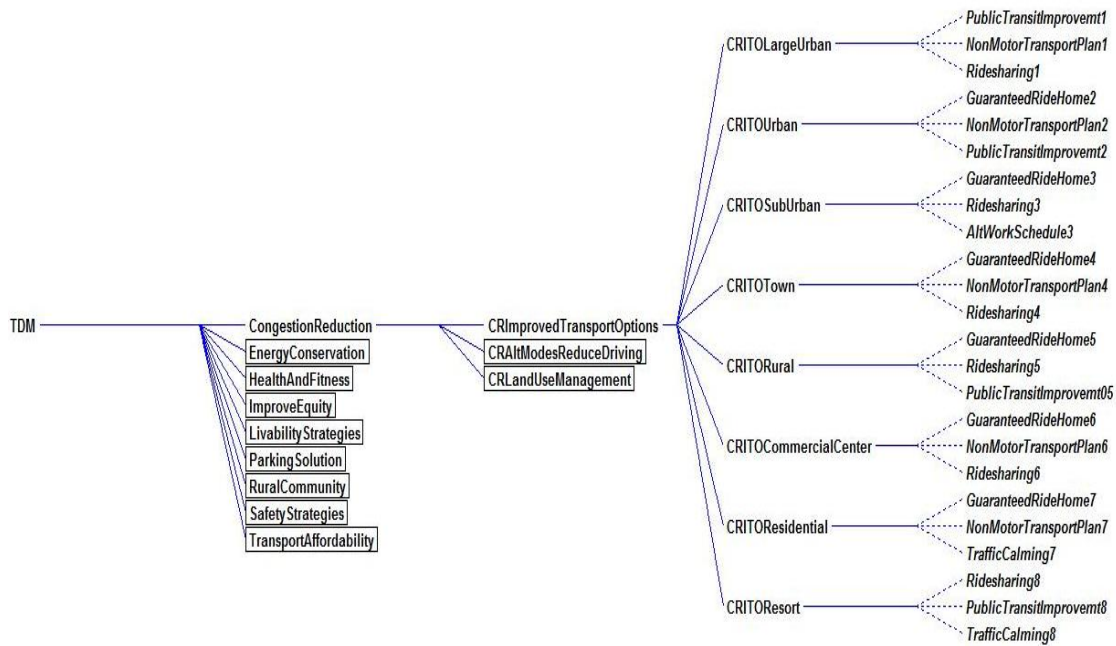


Fig.1 Example of hierarchical architecture of **improved transport options** for congestion reduction

Vanpooling usually uses rented vans (often supplied by employers, non-profit organizations or government agencies). Most vanpools are self-supporting – operating costs are divided among members. Vanpooling is particularly suitable for longer commutes. These slots are inherited from the parent class *CRImprovedtransportoption* which is a descendant of the *CongestionReduction* class.

C. Knowledge Based Model of E-ASSIST

The E-ASSIST knowledge base is made up of nine class module as mentioned in previous section, each deal with specific strategy of TDM domain. First, launch the E-ASSIST by opening the Kappa-PC software and open the E-ASSIST file (.kal) continued by open the *session* to start the expert advisory system. After the program is loaded, the general information interface appears (Fig.2) in the center of the displaying area if the computer has resolution of 1366x768 pixel (32 bits).

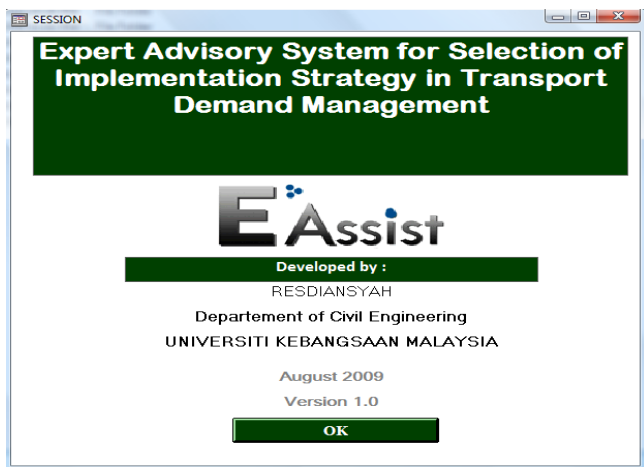


Fig.2 General information interface

By clicking on the *OK* button closes the general information interface and invokes the main E-ASSIST window, as shown in Fig.3. Two way communications between user and E-ASSIST has been started in this interface. Fig.3 shows the E-ASSIST main menu from which the advisory system for TDM can be accessed with the help of appropriate button. The main menu screen also has *e-library* and *ABOUT* button to give information about all TDM strategies used in this system and the system information in E-ASSIST.

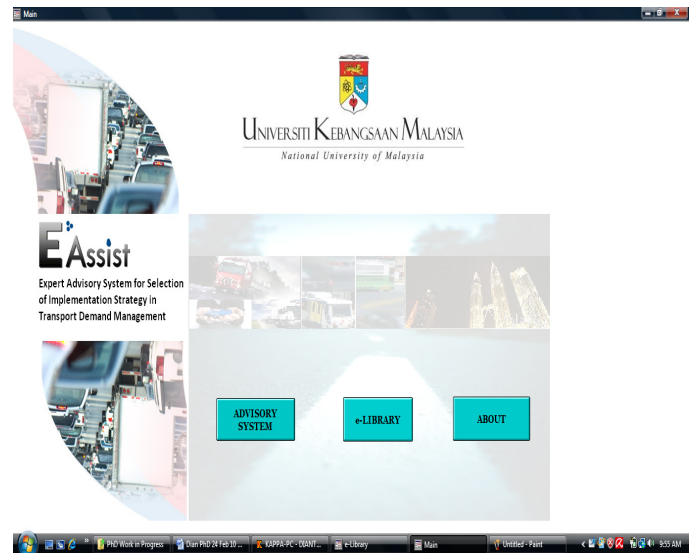


Fig.3 Main interface

D. Advisory System Module

Since the E-ASSIST system used in this project based on the 'objective to implement of TDM' as the input, clicking the on the *Advisory System* button leads the user to nine main objective of implementing TDM, as shown in Fig.4. There are nine main objectives associated in this interface as inputs define. Select the one that matches the problem the

user encountered in current situation in order to see the full description about the objective, in this case *Energy Conservation and Emission Reduction*. Example of this situation is when the new transport planner facing with the “pollution problem” in one area triggered by heavy vehicle such as trucks. To solve this issue, the user needs to select *Energy Conservation and Emission Reduction* as the input in line with the objective of this strategy to reducing vehicle

energy consumption and pollution emission. After the selection, the description of this TDM strategy is appeared on the specific box allocated. If user sure and confirmed with the input (correct main objective) then clicking on the *NEXT* button calls up the viewing window that displays the *Specific Aim to Achieve the Main Objective* interface, as shows in Fig.5.

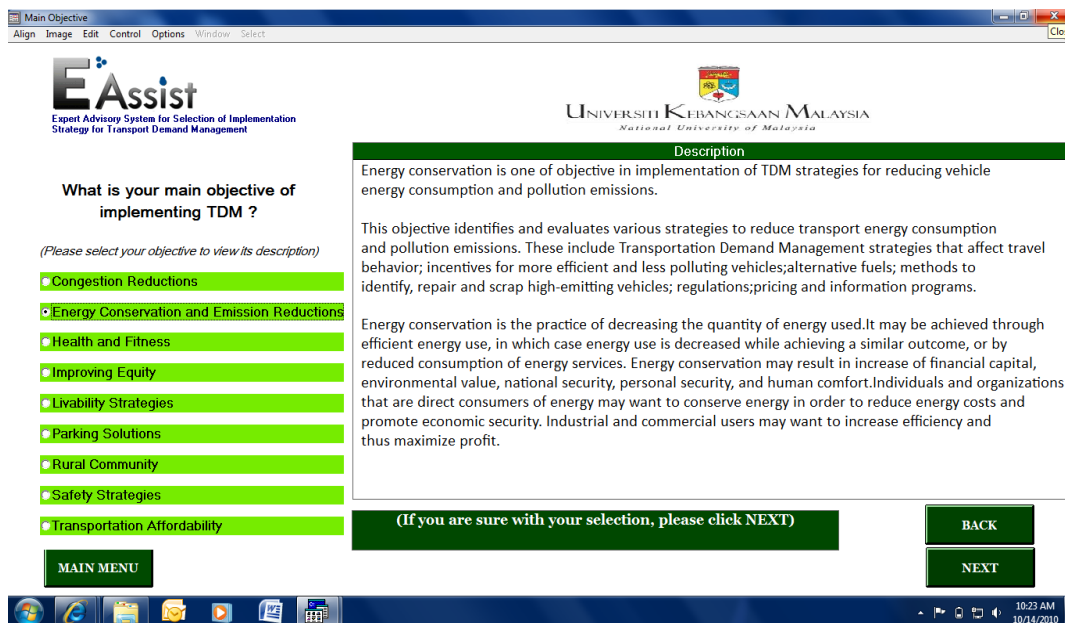


Fig.4 TDM main objective interface

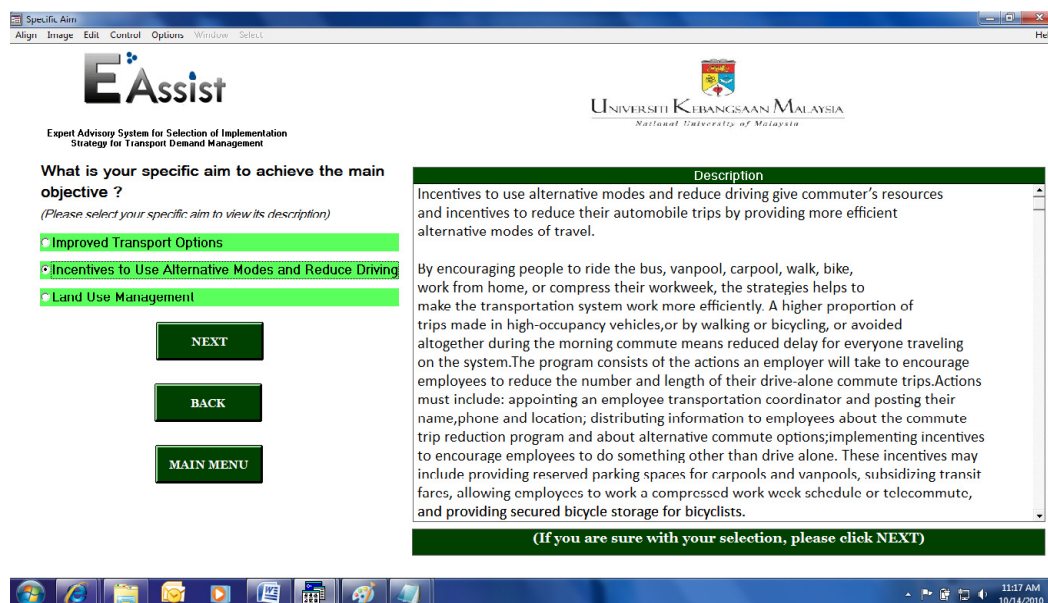


Fig.5 TDM specific aim interface

If the user cannot confirm the description is his/her objective to implement TDM then it is necessary to click BACK button, click on the other main objective as the input, read the TDM main objective description, and do the same step as before, until the actual main objective is found and confirmed. Once interface of *Specific Aim* appeared, clicking on the *bullet* button to see the specific aim description to

implement the TDM on how to achieve the main objective as shown in previous step. This dialog window is designed to ensure the user choose appropriate input to avoid wrong advise in appropriate strategy. In this case, user choose *Incentives to use Alternative Modes and Reducing Driving* as the *Specific Aim* to achieve main objective which is describe on the box it can give commuter’s resources and incentives

to reduce their automobile trips by providing more efficient alternative modes of travel. Again, if user sure and confirmed with the selection, then clicking on the *NEXT* button calls up the viewing window that displays the *GEOGRAPHICAL AREA* interface as shown in Fig.6. After selection of specific objective, the size of study area or area that want to be implement are listed on the left of interface window. Fig.7 shows the advice strategy window. It is display three appropriate strategies which is the most suitable TDM strategies to be implemented based on the input selection. The advice system considers three strategies for user to judging and makes decision of suitable TDM strategy. Description for all three strategies also provided in box dialog to help and guide the user. The user also can click the *VIEW IMPACT* button and *ADVISE STRATEGY*

IMPACT SUMMARY will display on the interface as shown on Fig.8. This figure shows the advice strategy for “fuel tax” as an example. Result shows that travel impact in term of reducing total traffic significantly as rating “2” was shown (beneficial). On benefit summary, environmental protecting given rating “3” which is significant reduce in fuel use and related pollutants. Advice strategy summary shows the travel impact, benefit and equity if the strategy chosen will be implemented. Based on the travel impact summary, user can easily to identified how effective reduction of trip or total traffic which is stated in the summary using the rating scale; rating from 3 (very beneficial) to -3 (very harmful); 0 indicates no impact or mixed impact on the objective if user implement this strategy.

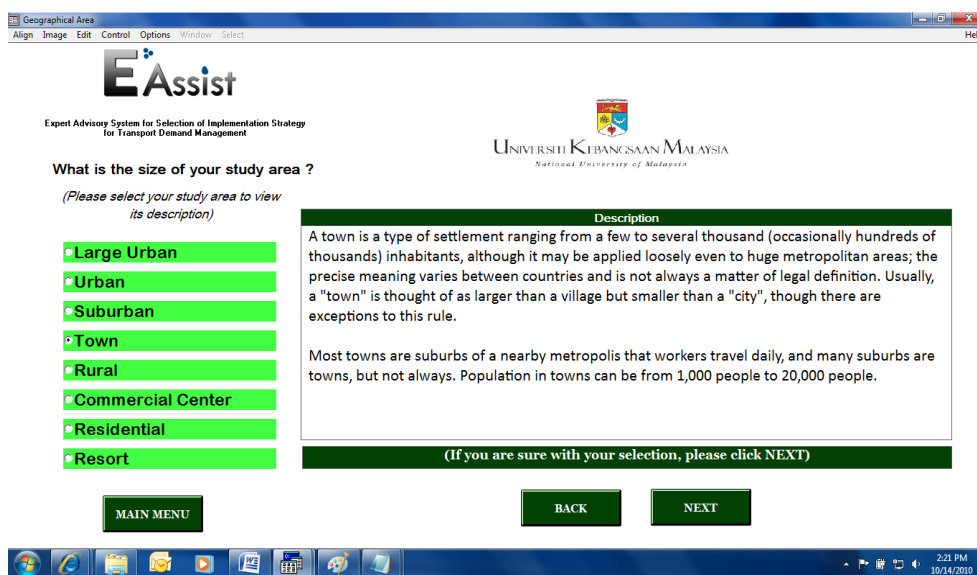


Fig.6 Geographical area interface

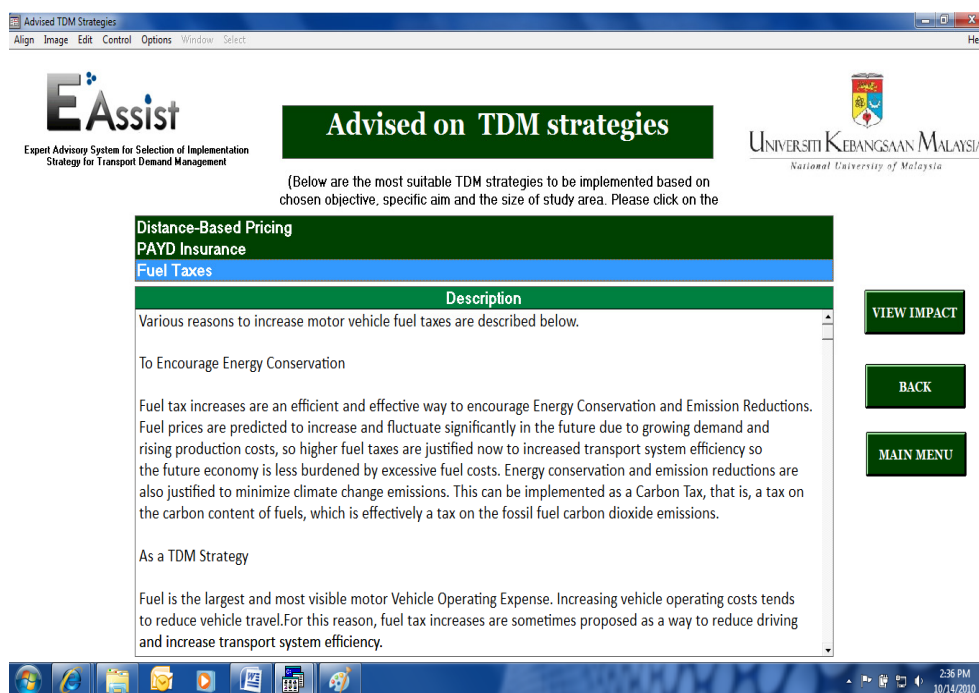


Fig.7 Advised TDM strategies result interface

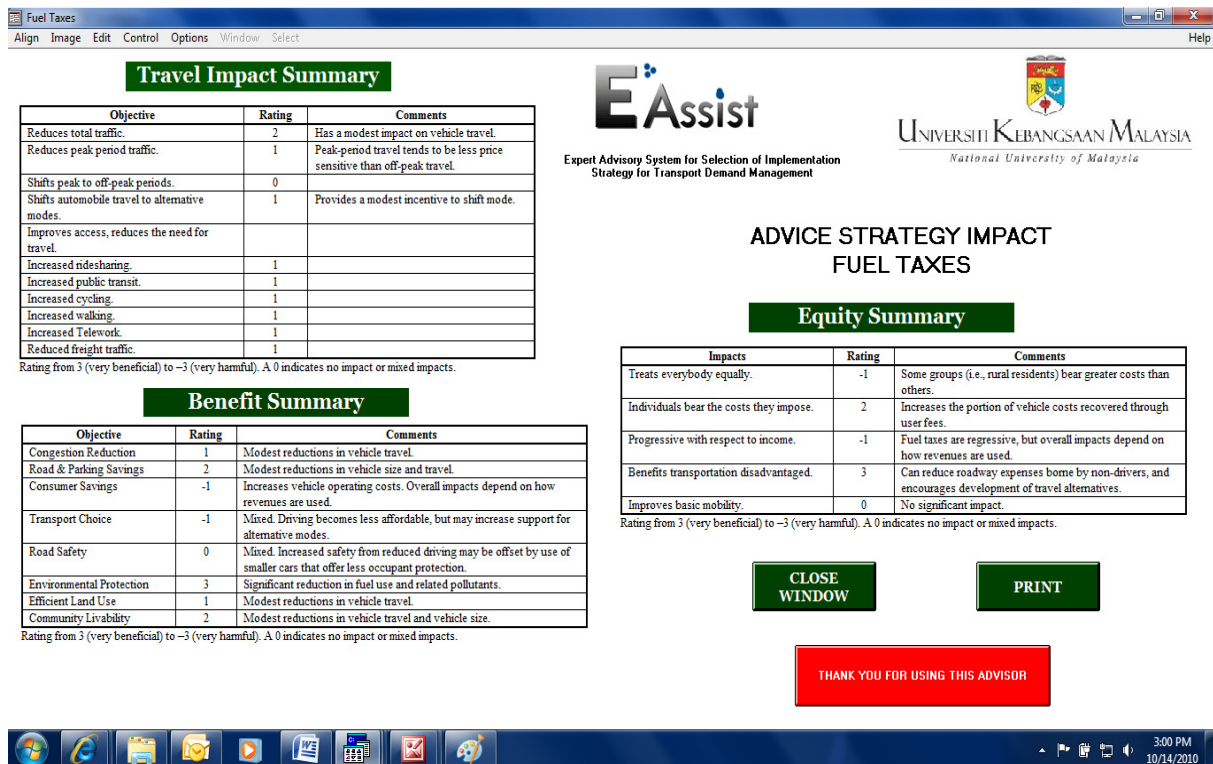


Fig.8 Impact summary interfaces

In this case, from the beginning user has been identified the objective was *Energy Efficiency* with specific aim is *Incentives to use Alternative Modes and Reducing Driving*; implementing in *TOWN*. As result mentioned, three advises were given according to the input selected such as *DISTANCE BASED-PRICING*, *PAYD INSURANCE* and *FUEL TAX*

E. Validation and Evaluation

Generally, the performances of the E-ASSIST were comprehensive and satisfactory to the author's judgment and evaluator who is expert in transportation field. The evaluators are different people (not domain expert) who have same qualification with the domain expert. The evaluation results demonstrated that the expert decision compared well with the E-ASSIST output. This is a positive indication of the accuracy of the knowledge base of the E-ASSIST. The user friendliness of E-ASSIST was the assessed to be satisfactory as a working prototype.

V. CONCLUSIONS

The expert system developed is user friendly, and it does not require the user to have any programming knowledge to use it. The user can smoothly navigate through nine different input screens before the system outputs its conclusion. Without referring to any TDM expert, the system can help young and inexperienced engineers and planners in their decision making. In addition, such systems are less costly to use and saves time. Since the knowledge in this domain is dynamically growing, the E-ASSIST is by no means complete at this stage.

REFERENCES

- [1] A.E.E. ElAlfi & M.E. El Alami. Intelligent Advisory System for Supporting University Managers in Law. *(IJCSIS) International Journal of Computer Science and Information Security*, Vol. 3, No. 1, 2009.
- [2] E. Turban & J. Aronson. *Decision Support Systems and Intelligent Systems*. 5th Edition. ISBN:0137409370. Prentice Hall
- [3] G. Frame. *Traffic Management and Transport Demand Management. Distance Learning Course in Urban Planning*, Chapter 4, pp 1-19, 2010.
- [4] G. Forslund, *Toward Cooperative Advice-Giving Systems. IEEE Expert: Intelligent Systems and Their Applications*. Volume 10, Issue 4, Pp 56-62. IEEE Educational Activities Department Piscataway, NJ, USA, 1995.
- [5] G.D. Gregg & S. Walczak. Auction Advisor: an Agent-Based Online-Auction Decision Support System. *Decision Support Systems* 41 (2006) 449– 471. Elsevier, 2006.
- [6] IntelliCorp, Inc. Kappa-PC Ver. 2.4 User Manual. CA: *IntelliCorp Inc*, 1997.
- [7] N.Islam. an Expert System for Mix Design of High Performance Concrete. *Journal of Advances in Engineering Software*. Volume 36, Issue 5. Pp. 325 – 337. ISSN: 0965-9978. Elsevier Science Ltd. Oxford, UK, 2005.
- [8] P. Papaioannou & G. Georgiou. Are Traffic Demand Management (TDM) measures a solution for traffic problems in urban areas? The Greek experience. *Transport and Management Section, Department of Civil Engineering*, Aristotle University of Thessaloniki, 2003.
- [9] T. Litman. Are Vehicle Travel Reduction Targets Justified? Evaluating Mobility Management Policy Objectives Such As Targets to Reduce VMT and Increase Use of Alternative Modes. *Victoria Transport Policy Institute*. Available online at www.vtpi.org/vmt_red.pdf, 2009.